


Stucco embossed aluminum with kraft paper

Haomei is specialized in supply **stucco embossed aluminum with kraft paper** or polysurlyn back in aluminum jacketing coil roll for heat insulation and moisture barrier.

Specification of stucco embossed aluminum with kraft paper

1. Alloy no.:3003, 3004, 3105(antirust), 1050, 1060, 1100(normal)
2. Temper : H14 ,H16 ,H24 ,H26
3. Thickness: 0.2-2.0mm
4. Width: 914 mm, 1000, 1200, 1220mm or as customer's requirement
5. Length: 2000-30000mm
6. Facing: compound with kraftpaper or Polysurlyn or Polykraft
7. Surface Finish: flat, stucco embossed, corrugated, smooth or orange peel embossed
8. Packing : In export sea -worthy wooden pallets,each small roll in one cardbox and 16 or 20 cardbox in one pallet
9. Delivery : within 35 days after receipt the deposit or LC
10. Monthly production capacity is about 5,000 tons

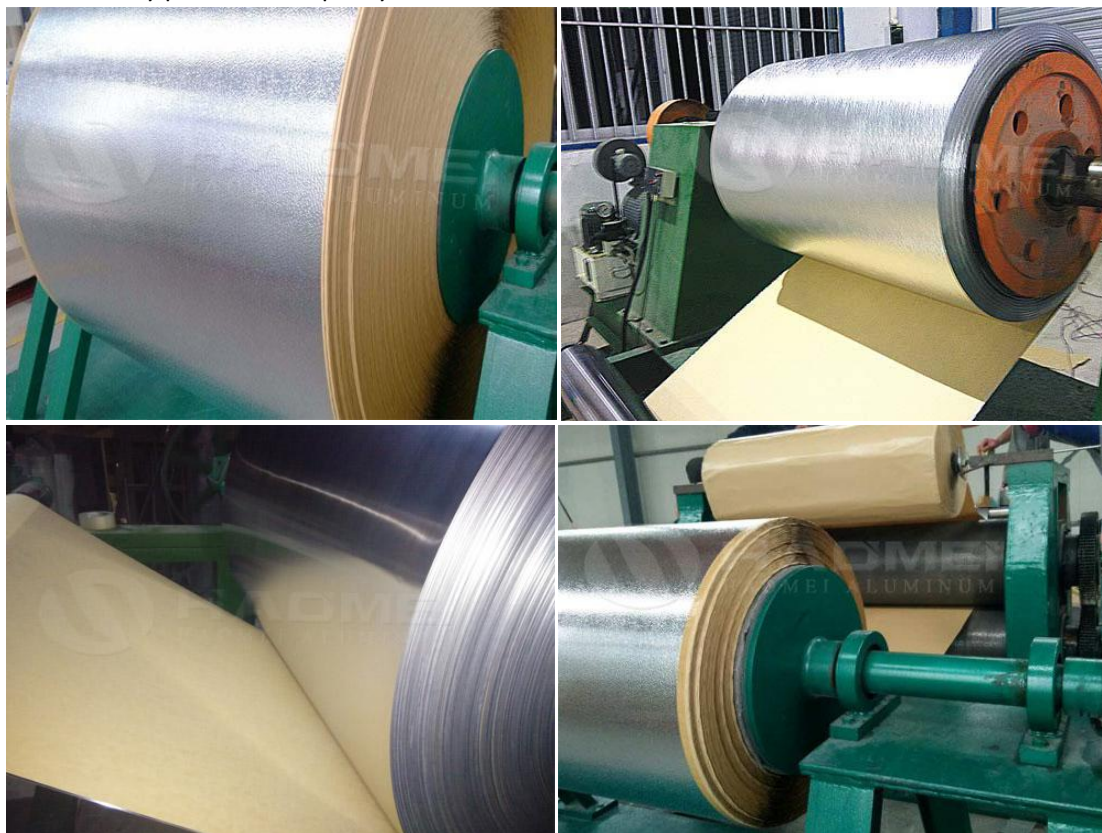

Heat Insulation stucco embossed aluminium with polykraft paper

Aluminium Alloy	Thickness (mm)	Width (mm)	Temper
1050,1060,1100	0.2-2.0	800-2000	H14,H16,H24,H26
3003,3004,3105	0.2-2.0	800-2000	H14,H16,H24,H26
Standard Size	standard thickness:0.3-1.2mm		
	standard width:914mm/1000/1200/12120mm		
Customerized size	Size can be produced as per clients requirement		
Surface	mill finish, flat, smooth, stucco emboss(orange peel), corrugation		
Back lamination	polykraft paper, polysurlyn, kraft paper, craft paper		
Polykraft thickness	about 0.1mm		
Corrugation type	6x32mm(wave height 6mm ,and wave distance 32mm)		
Quality Standard	ASTM B209,EN573-1		
MOQ per size	1 tons		
Payment Terms	TT OR LC OR DP at sight		
Delivery time	Within 30 days after receipt the lc or deposit		
Material Quality	Tension level, Flat, Free of defects like oil stain, Roll Marks, waves, dents, Scrath,etc A+++ quality		
Application	heat insulation moisture barrier, oil field		
Packaging	Standard export worthy wooden pallets, and standard packing is about 2 .5tons/pallet or 100 feet one roll		
	Coil Id:508mm, eye to wall or eye to sky as per clients requirement		
	or 100 feet one roll and each roll packed in one carton box, one 20' container can be loaded about 280 rolls		

Advantages of aluminum jacketing with polysurly kraft paper:

- 1, Damp-proof, anti-corrosive, wearable and durable.
- 2, Has high strength, hardness, toughness and long service life.
- 3, Regular pattern on the flat aluminum sheet will not cause strong light reflection and have a better vision effect.
- 4, Attaching the kraft paper to the aluminum sheet can prevent moisture, and therefore protect the sheet from oxidation. It also plays damp-proof and antiseptic role.

Application of aluminium stucco embossed with polykraft paper

- 1, It can be used for the insulation, moisture barrier protection of pipes, fittings and equipment.
- 2, It can also be used for the insulation and moisture barrier jacketing of the equipment, instruments and tanks.

Production standard of kraft aluminum jacketing stucco embossed

All chemical composition, mechanical property, size tolerance, flat tolerance, etc strictly as per ASTM OR EN standard.

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Other		Al
									Single	Total	
1050	0.25	0.4	0.05	0.05	0.05	—	0.05	0.03	0.03	—	≥99.5
1060	0.25	0.35	0.05	0.03	0.03	—	0.05	0.03	0.03	—	≥99.6
1100	Si+Fe:0.95		0.05~0.40	0.05	—	—	0.1	—	0.05	0.15	≥99
1200	Si+Fe:1.00		0.05	0.05	—	—	0.1	0.05	0.05	0.15	≥99
3003	0.6	0.7	0.05~0.20	1.0~1.5	—	—	0.1	—	0.05	0.15	Remainder
3105	0.6	0.7	0.3	0.30~0.8	0.20~0.8	0.2	0.4	0.1	0.05	0.15	Remainder

Quality Assurance of Aluminum jacketing with Polysurlyn/kraft paper/stucco embossed

We have strictly quality control system from aluminium ingot to finish stucco embossed aluminum sheet/coil with kraft paper products, to make sure that only qualified product will be delivered to clients. And our production process is approved by SGS and BV.